


4069LE Electric Scissor Lift



4069LE Electric Scissor Lift

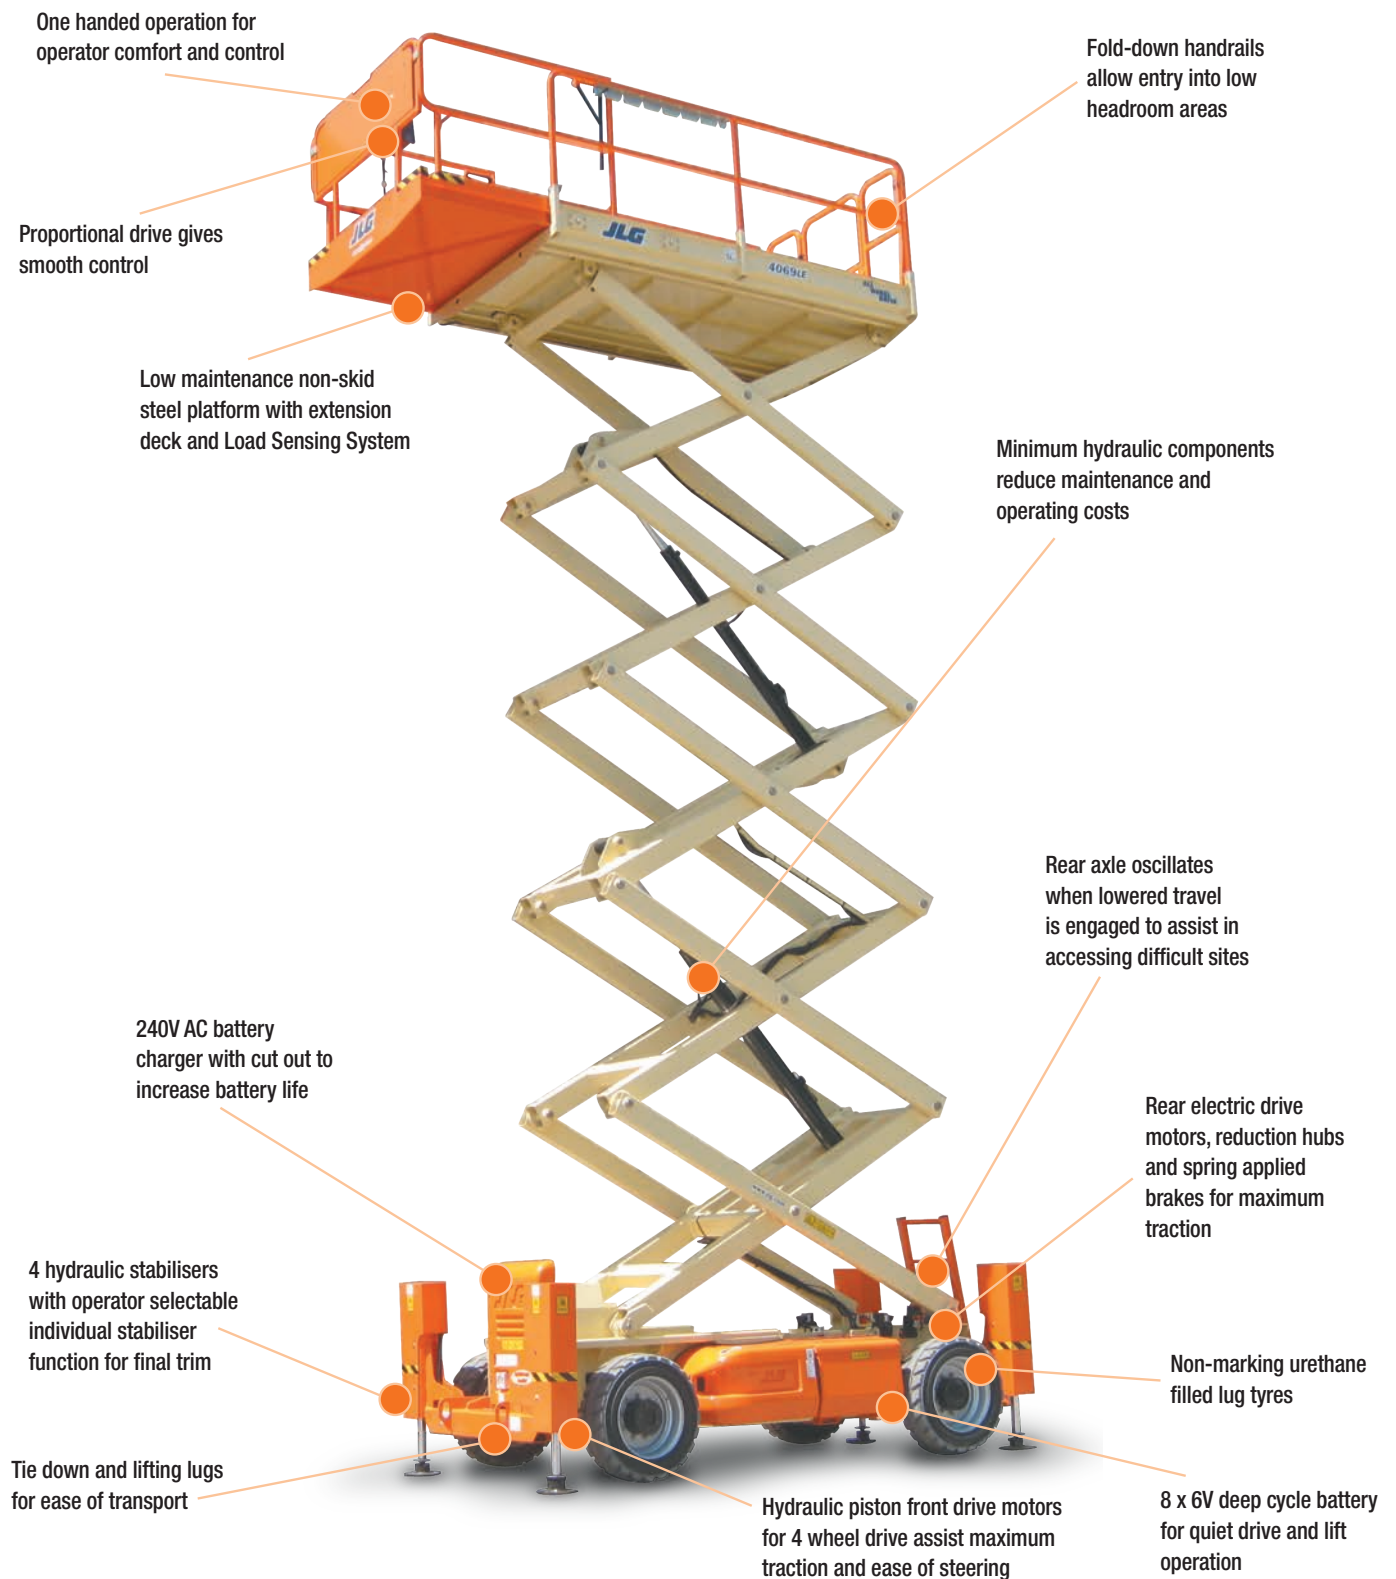

QUESTIONS TO ASK

- What are the ground conditions in the work area?
- Is the site level, will you need stabilisers?
- What is the rated capacity needed for the job?
- Do you need an extension lead outlet in the platform?
- Do you need non-marking tyres?
- Do you have 240V AC power on site?

KEY SELLING POINTS

- Smooth control, proportional electric drive, with two speed ranges
- Oscillating rear axle for constant rear wheel traction
- 4 wheel drive assist with front (steer) hydraulic drive motors with constant traction speed sensor
- Fold-down rails on main deck and extension platform
- Non-marking urethane filled tyres
- Constant traction rear 2 wheel drive combined with drive assist for 45 per cent gradeability
- Wide scissor stack provides rigidity and stability
- Extended stabilisers prevent drive
- Manual level stabiliser feature allows individual stabiliser levelling from platform controller
- Multi axis 4 degree level sensor
- Plug in JLG analyser to indicate system functions for servicing and adjustment
- Removable platform control box

APPLICATIONS

- Facilities maintenance
- Shopping centres and other indoor/outdoor areas
- Manufacturing and warehouse applications and stock-takes
- Electricians
- Plumbers
- Window installers
- All maintenance and construction work
- Factory fit outs before electrical power is connected

SPECIFICATIONS

Performance:

| | |
|----------------------------|--------|
| Platform Height (max.) | 12.19m |
| Working Height | 14.19m |
| Lift Time | 54 sec |
| Lower Time | 50 sec |
| Platform Capacity Standard | 360kg |

Dimensions:

| | |
|---------------------------------------|--------------|
| Stowed Height - Rails Up | 2.81m |
| Stowed Height - Rails Lowered | 2.04m |
| Minimum Transport Length (outriggers) | 3.07 (3.81)m |
| Overall Width | 1.75m |
| Wheelbase | 2.32m |
| Ground Clearance | 0.2m |
| Platform Width | 1.65m |
| Platform Length | 2.92m |
| Standard Platform Extension | 0.91m |
| Platform Height Lowered | 1.75m |
| Maximum Drive Height | 9.14m |

Power:

| | |
|-----------------------|-------------|
| Power Source | Battery |
| DC Voltage | 48V |
| DC Power | 370 Amp h |
| Drive Motors - Type | DC Electric |
| Hydraulic Pump - Type | Gear |
| Batteries | 8 x 6V |

Travel:

| | |
|----------------------|-------------------------|
| Tyre Size | 240/55-17.5 |
| Tyre Type | Foam Filled/Non-marking |
| Inside Turn Radius | 2.29m |
| Outside Turn Radius | 4.88m |
| Drive Speed Elevated | 0.64km/h |
| Gradeability | 35% |

Weights and Capabilities:

| | |
|-------------------------|---------|
| Hydraulic Tank Capacity | 32 Ltr |
| Operating Weight | 5,300kg |